



# CW<sup>3</sup> 400UL Automatic Checkweigher

[www.loma.com](http://www.loma.com)

Versatile, proven Ultra-LightWeight checkweighing systems for the food and packaging industries



- **Versatile** Weighs a wide range of flexible and rigid packs up to 400g
- **Accurate** High accuracy, especially with flexible packaging
- **Fast** Belt speeds up to 115m/min
- **Reliable** Built for 24/7 operation
- **Accredited** OIML R51 and EC TAC (MID) pending
- **Easy to use** Full colour graphical touch screen
- **Environment** Wide operating temperature range 0-40°C



Metal Detection

X-ray Inspection

Checkweighers

Data Capture

**Designed to Survive**




# CW<sup>3</sup> 400UL Automatic Checkweigher

Finish:	304 stainless steel with brushed finish
Available Line Heights:	750mm - 950mm
Available System Lengths:	1,000mm - 3,000mm
Maximum Weight:	400g
Maximum Product Width:	200mm
Maximum Product Length:	200mm
Typical Accuracy, Un:	0.3g
Maximum Speed:	115m/min
Capacity:	Up to 440ppm
Supply Voltages:	110 or 230V/1ph/N+E 50 or 60Hz
Air Supply:	5 to 8 bar
Typical Reject Options:	Air Blast, Pusher, Diverter
Environment:	IP65
Belt type:	Food quality flat belt - quick release (no tools required)
Standard inclusions:	Adjustable feet, Reject bin, USB socket, Multi speed, Pack pitch monitor, Stainless steel covers
Options:	Servo feedback signal - for filler control, Serial Link, LomaEnet, LED Indicator stack, Makrolon covers, 316 stainless steel, more than 950mm line height



## Technical Specification

- Stainless steel construction
- Product specific filtering
- Automatic mean weight correction
- Sample packs function
- Multi-product memory (500)
- Brushless motors
- High capacity loadcell
- True multi-speed
- R51 Approved to X(1) e = 1g

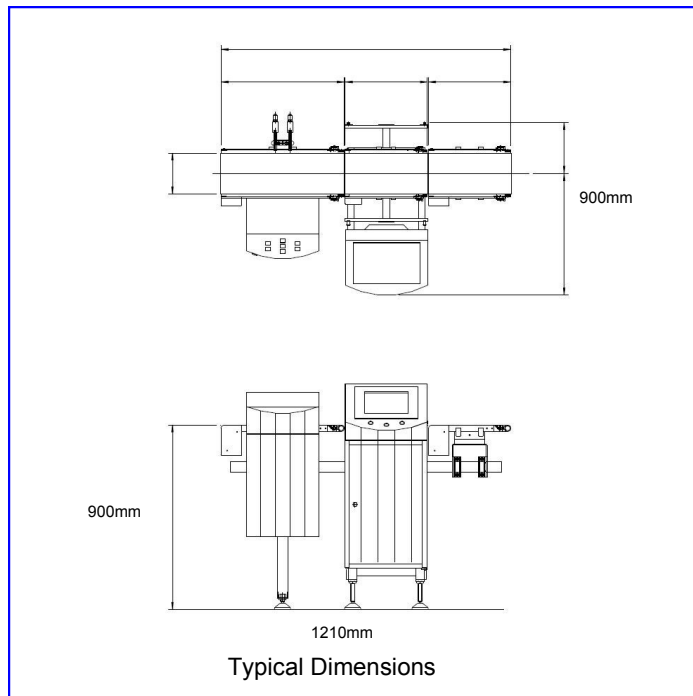

QPM Ltd., Unit 12, Robinhood Business Park, Robinhood Road, Dublin 22, Ireland  
Tel: +353 (0) 1 450 2421, Fax: +353 (0) 1 450 2311,  
Email: mnevin@qpm.ie Web: www.qpm.ie



## Designed to Survive