



## CW<sup>3</sup> Checkweigher / Metal Detector Combination System

[www.loma.com](http://www.loma.com)

Versatile, proven integrated combination checkweighing and metal detection systems for the food and packaging industries



- **Adaptable** True variable frequency detection adapts to new product and packaging in seconds
- **Versatile** Weighs a wide range of flexible and rigid packs up to 6kg
- **Accurate** Excellent accuracy, especially with flexible packaging
- **Compact** Integrated to save line space
- **Reliable** Heavy duty conveyor components, high quality electronics
- **Effective** Loma expertise in both technologies ensures maximum system performance
- **Easy to use** Integrated colour graphical touch screen
- **Accredited** OIML R51 and EC TA (MID) approved



Metal Detection

X-ray Inspection

Checkweighers

Data Capture

# Designed to Survive




## CW<sup>3</sup> Checkweigher / Metal Detector Combination System

Finish:	304 stainless steel with brushed finish
Available Line Heights:	750mm - 950mm
Available System Lengths:	1,900mm - 2,900mm
Maximum Weight:	6kg
Maximum Product Width:	400mm
Maximum Product Length:	600mm
Typical Accuracy, Un:	0.6g
Maximum Speed:	115m/min
Capacity:	Up to 400ppm
Supply Voltages:	110 or 230V/1ph/N+E 50 or 60Hz
Air Supply:	5 to 8 bar
Typical Reject Options:	Air Blast, Pusher, Diverter
Environment:	IP65
Belt type:	Food quality flat belt - quick release (no tools required)
Standard inclusions:	Adjustable feet, Reject bin, USB socket, Multi speed, Pack pitch monitor, Stainless steel covers
Options:	Servo feedback signal - for filler control, Serial Link, LomaEnet, PVS, LED Indicator stack, Makrolon covers, 316 stainless steel, more than 950mm line height



### Technical Specification

Stainless steel construction
Multi-product memory (200)
Brushless motors
True multi-speed
Product specific filtering
Sample packs function
Automatic mean weight correction
High capacity loadcell
R51 Approved to X(1) e = 1g
PVS - performance validation system
Aperture heights 100mm - 250mm in 50mm increments
Aperture widths 150mm - 450mm in 100mm increments

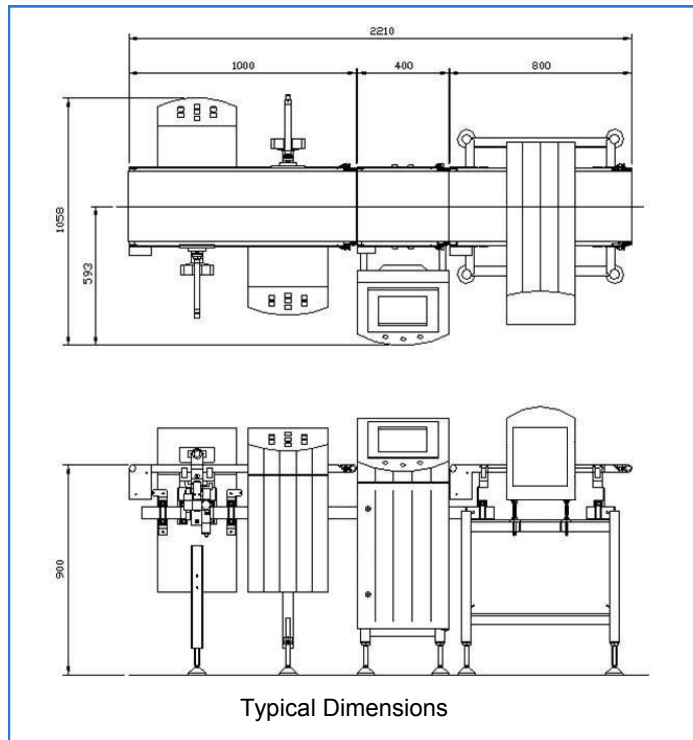

QPM Ltd., Unit 12, Robinhood Business Park, Robinhood Road, Dublin 22, Ireland  
Tel: +353 (0) 1 450 2421, Fax: +353 (0) 1 450 2311,  
Email: [mnevin@qpm.ie](mailto:mnevin@qpm.ie) Web: [www.qpm.ie](http://www.qpm.ie)



## Designed to Survive